

GU10 Bulbs

Product Code


OPTIGU10W7PA220V

OPTIGU10W7PA220VD



IP rating	20
Ik rating	6
Source type	Hight power LED
Source life time	>50,000h at 25°C ambient temperature
CRI	>80
Step McAdam	3
Source flux	980 lm
Source efficiency	140 lm/W
Delivered flux	770 lm
Delivered efficiency	110 lm/W
Input power	7W
Supply voltage	AC 100-240V
Insulation Class	insulation class III
Power supply	Built in constant current
Material	Plastic aluminum
Light colour/CCT	2700K/3000K/4000K/6000K
Beam angle	25°/40°/60°
Base	GU10
Reflector color	-
Finishing	white

Technical drawing

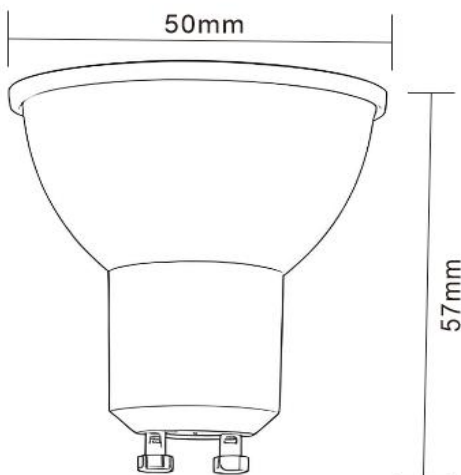

Temperature limits

Working temperature	-30C° to +50C°
Storage temperature	-50C° to +80C°


Light control

ON/off,Phase dimming

Construction

The outermost shell is made of plastic, the inside is made of aluminum, and the PC diffusion lampshade

Photometrics

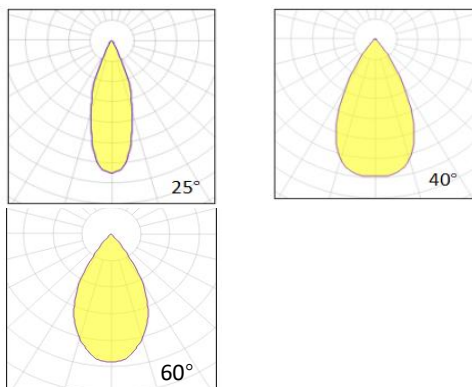

Warranty

- 5-year limited system warranty standard
- Warranty does not cover product failure due to an overvoltage event (power surge)
- For installations where power surge may be possible, NICOR recommends installing additional surge protection at the electrical distribution panel

Specifications

