


## Strip light

Product Code  
 OPTISLSD192P16W24V  
 OPTISLSD192P16W24VD



<b>IP rating</b>	20
<b>Ik rating</b>	0
<b>Source type</b>	High power LED
<b>Source life time</b>	>50,000h at 25°C ambient temperature
<b>CRI</b>	>90
<b>Step McAdam</b>	3
<b>Source flux</b>	1920 lm
<b>Source efficiency</b>	120 lm/W
<b>Delivered flux</b>	1600 lm
<b>Delivered efficiency</b>	100 lm/W
<b>Input power</b>	16 W
<b>Supply voltage</b>	24V DC
<b>Insulation Class</b>	insulation class III
<b>Power supply</b>	-
<b>Material</b>	Flexible Printed Circuit
<b>Light colour/CCT</b>	2700K/3000K/4000K/6000K
<b>Beam angle</b>	120°
<b>Mounting</b>	surface mount
<b>LED Qty</b>	192

## Technical drawing

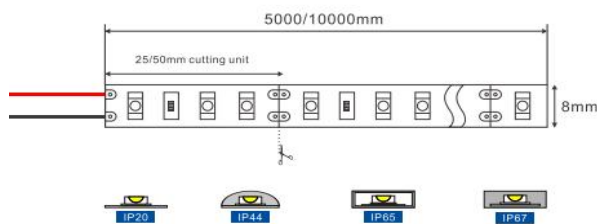

## Temperature limits

<b>Working temperature</b>	-30°C to +50°C
<b>Storage temperature</b>	-50°C to +80°C


## Light control

ON/off, optional DALI dimming

## Construction

Flexible Printed Circuit, Double sided adhesive tape on the back of the light strip

## Photometrics



## Warranty

- 5-year limited system warranty standard
- Warranty does not cover product failure due to an overvoltage event (power surge)
- For installations where power surge may be possible, NICOR recommends installing additional surge protection at the electrical distribution panel

## Specifications

