


Strip light

Product Code
 OPTISLUB240P20W24V
 OPTISLUB240P20W24VD



| | |
|-----------------------------|--------------------------------------|
| IP rating | 20 |
| Ik rating | 0 |
| Source type | Hight power LED |
| Source life time | >50,000h at 25°C ambient temperature |
| CRI | >90 |
| Step McAdam | 3 |
| Source flux | 2400 lm |
| Source efficiency | 120 lm/W |
| Delivered flux | 2000 lm |
| Delivered efficiency | 100 lm/W |
| Input power | 20W |
| Supply voltage | 24V DC |
| Insulation Class | insulation class III |
| Power supply | - |
| Material | Flexible Printed Circuit |
| Light colour/CCT | 2700K/3000K/4000K/6000K |
| Beam angle | 120° |
| Mounting | surface mount |
| LED Qty | 240 |

Technical drawing

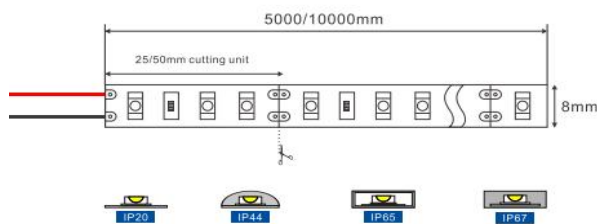

Temperature limits

| | |
|----------------------------|----------------|
| Working temperature | -30°C to +50°C |
| Storage temperature | -50°C to +80°C |


Light control

ON/off, optional DALI dimming

Construction

Flexible Printed Circuit, Double sided adhesive tape on the back of the light strip

Photometrics



Warranty

- 5-year limited system warranty standard
- Warranty does not cover product failure due to an overvoltage event (power surge)
- For installations where power surge may be possible, NICOR recommends installing additional surge protection at the electrical distribution panel

Specifications

