

Landscape Tree Lights


Product Code

OPTOSL2DS64*2W220VB



IP rating	65
Ik rating	8
Source type	High power LED
Source life time	>50,000h at 25°C ambient temperature
CRI	>80
Step McAdam	3
Source flux	15360 lm
Source efficiency	120 lm/W
Delivered flux	10240 lm
Delivered efficiency	80 lm/W
Input power	128W
Supply voltage	110~240V AC
Insulation Class	insulation class III
Power supply	Built in constant current
Material	aluminium
Light colour/CCT	3000K/4000K/6000K
Beam angle	12°/24°/36°/60°
Mounting	surface mount
Reflector color	black
Finishing	Grey

Technical drawing

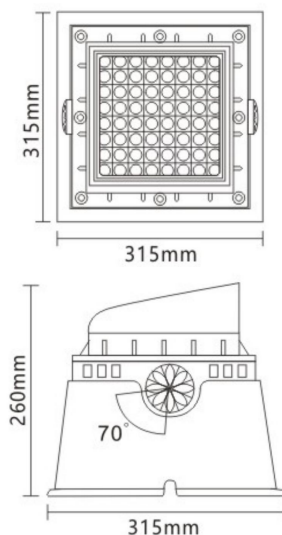

Temperature limits

Working temperature	-30C° to +50C°
Storage temperature	-50C° to +80C°


Light control

ON/off

Construction

Die cast aluminum shell, surface sandblasting treatment, anti-corrosion and rust prevention, tempered glass, stainless steel screws, adjustable angle $\pm 70^\circ$


Photometrics

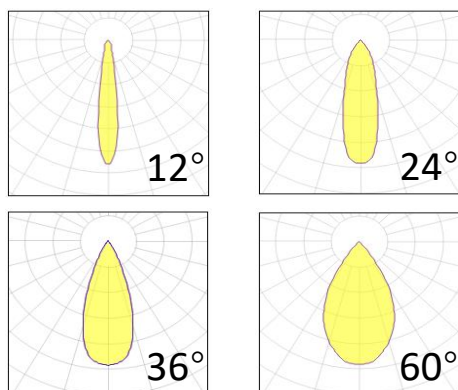

Warranty

- 5-year limited system warranty standard
- Warranty does not cover product failure due to an overvoltage event (power surge)
- For installations where power surge may be possible, NICOR recommends installing additional surge protection at the electrical distribution panel

Specifications



OPTILUX LIGHTING

Optilux reserves the right to make changes to this product at any time without notice and such change will be effective immediately.
Copyright © 2024 FANGTIAN TECHNOLOGY LLC.